
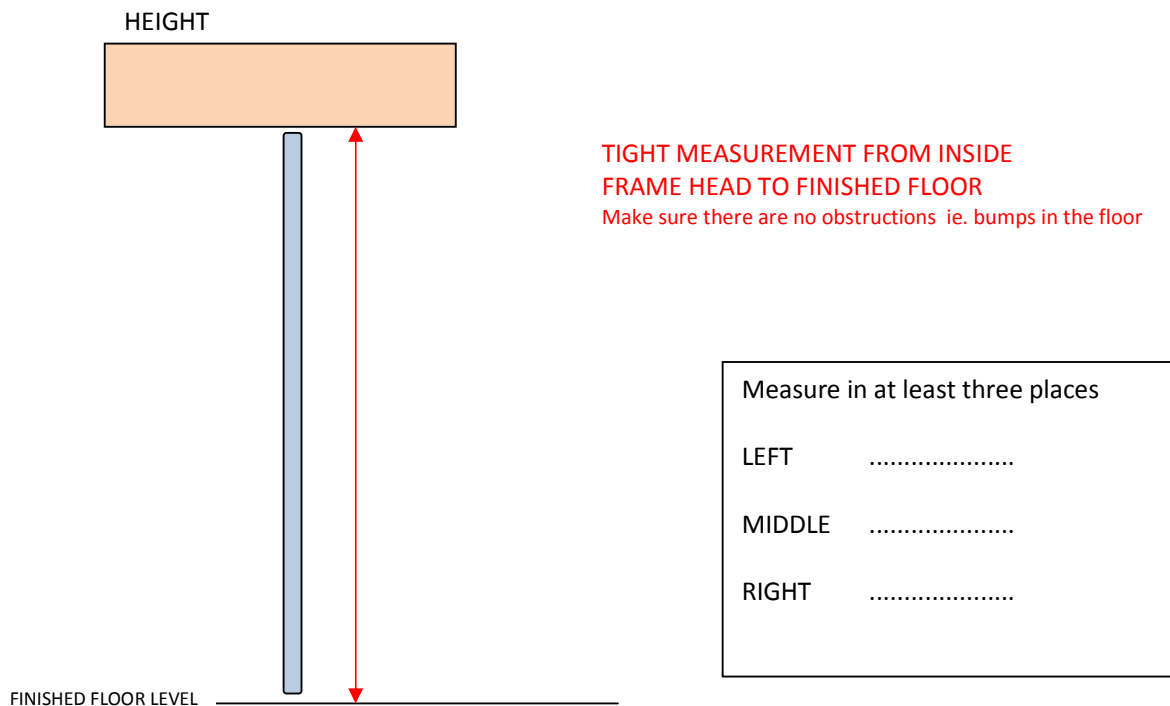


## MEASURE FOR DOUBLE ACTION HINGED GLASS DOORS – Single doors and Double doors

The surface/wall(s) need to be square and plumb.

If the measurements deviate by more than 4mm you should consider changing the opening

The surface/wall needs to be flush along the whole length where the glass will fit and open – ie NO SKIRTING BOARD

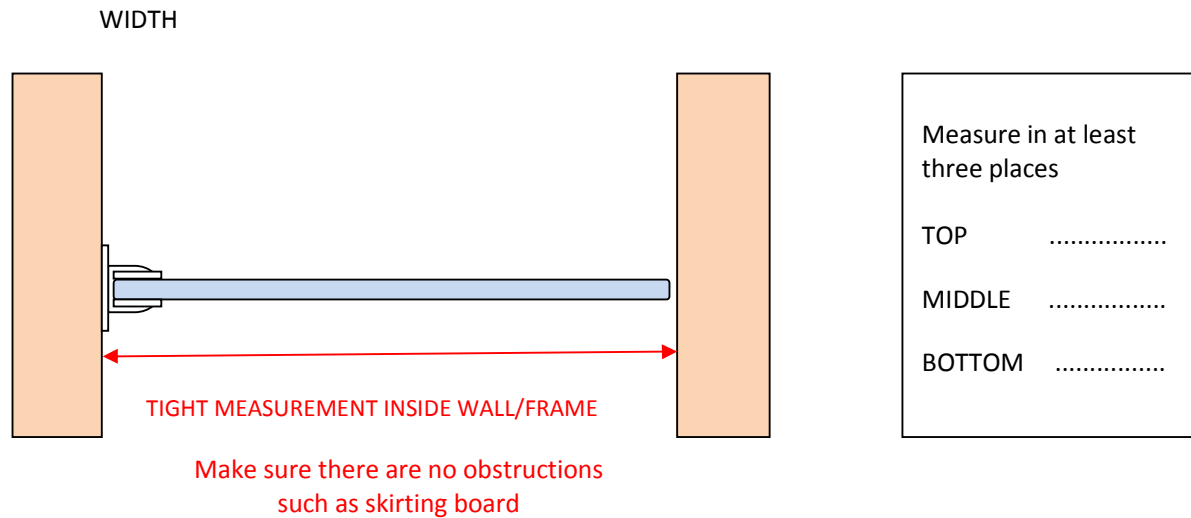

### IMPORTANT NOTES:

**Height - make sure there are no obstructions ie. Bumps in the floor/sloping floor**

**Width - make sure there are no obstructions such as skirting boards**

**Unica and Triloba hinges fix into the floor – cannot be used with under floor heating**

**Fixing surfaces need to be solid ie timber, so that good, sound fixing for hinges can be obtained**

FROM THE TIGHT MEASUREMENTS WE WILL USE THE SMALLEST SIZE AND MAKE THE APPROPRIATE ALLOWANCES FOR CLEARANCES BASED ON YOUR CHOICE OF HARDWARE.